

SAS 24

Control unit 24 V

Design

SAS 24 is made for a two-position control of dampers with requirement of fast rotation. The motor is delivered without cable.

Installation


SAS 24 is mounted on the damper axle. A plastic lever (1) locks the motor to the damper.

Setting of rotation angle

The rotation angle is preset for 90° rotation. The current angle is shown by the indicator (2). When installing the motor, the indicator and the damper blade have to be aligned. A factory preset cam shaft is pushing the micro switches in the end position. N.B.! If the cam shaft has to be altered, Fumex must be contacted.

Wiring diagram

Connect the feeding cable according to wiring diagram below.

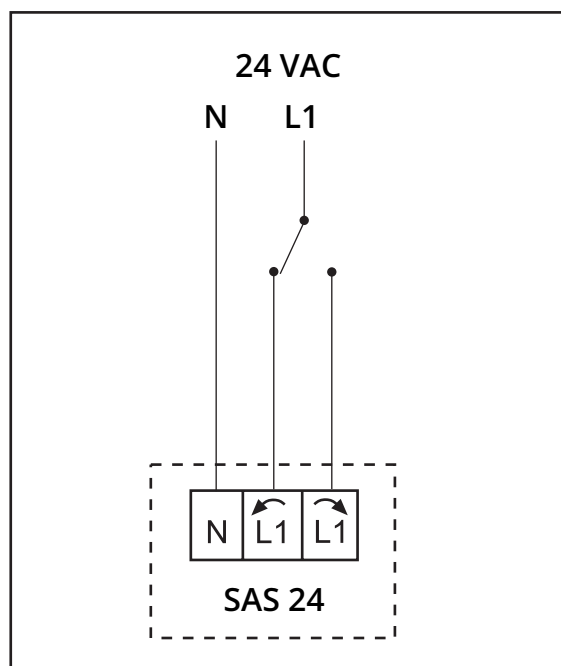

Technical data

Feed:.....24 VAC
 Frequency:.....50/60 Hz
 Power consumption:.....2 VA in operation /
 0 VA in end position
 Protection class:.....II
 Ambient temp:.....0-55°C
 Torque:.....3 Nm
 Opening time 90°:.....7,5 s
 Weight:.....640 gram

Meet standards


- EN 60 335-1 AM. 2, 5, 6, A51-A53 (73/23/EEC)
- EN 50 081-1 (89/336/EEC emission)
- EN 50 082-1 (89/336/EEC immunity)

Enclosure

Material:.....PA
 Air tightness class:.....IP54
 Dimensions:140x100x85 mm

Maintenance

Maintenance free

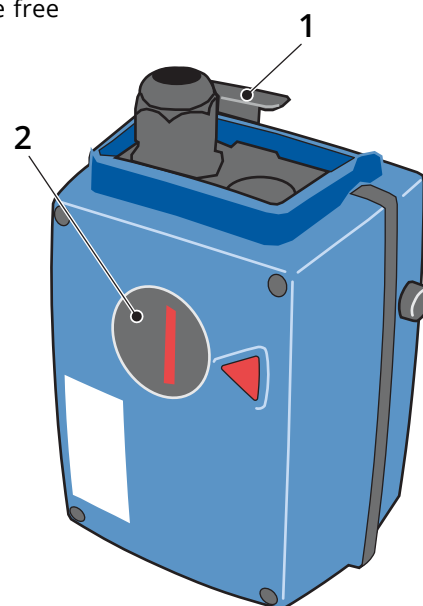

EXTRACTION ARMS • VEHICLE EXHAUST EXTRACTION • FANS • FILTERS • CURTAINS • CONTROLS

FUMEX

G:a Burträskvägen 48, 931 92 Skellefteå, Sweden • Tel.: +46 910-361 80 • E-mail: info@fumex.se
www.fumex.com